

TMMA pullers series EasyPull

Mechanical EasyPull

Safe and simple bearing dismounting

Equipped with spring-operated arms and a solid design, SKF's patented EasyPull is one of the most user-friendly and safe tools on the market. Ergonomically designed, the spring-operated arms enable the user to position the puller behind the component with just one movement. The mechanical TMMA series consists of 3 (TMMA 60, TMMA 80 and TMMA 120) pullers differing in size and withdrawal force.



- Sturdy design allows dismounting of components even in the tightest application in a safe manner
- The unique red rings spring-operated opening mechanism allows the EasyPull to be placed behind the component with one movement of the hands
- Self-locking arms help prevent the risk of puller slipping under load
- Double hexagonal heads allow easier application of withdrawal force
- Self-centring capability and nosepiece help to avoid damage to shaft
- Efficient use of time due to quick dismounting
- Available in three sizes with a withdrawal force of 60, 80 or 120 kN (6.7, 9.0 or 13.5 ton US), enabling easy selection
- Hydraulic force generators available as an accessory for the 80 and 120 kN versions



Dismounting



Hydraulic EasyPull

Quick and effortless bearing dismounting

The hydraulic versions of the EasyPull, TMMMA 75H and TMMMA 100H, combine the user friendliness of the mechanical EasyPull with the effortless force generation provided by integrated hydraulic spindles. The pullers are protected from overload by safety valves built in their hydraulic spindles.

- Ready-to-use, integrated hydraulic cylinder, pump and puller - thus it is assembly-free and it is not necessary to purchase separate parts
- Safety valve prevents spindles and pullers from being overloaded if excessive force is applied
- The spring-loaded centre point on the hydraulic spindle allows easy centring of the puller on the shaft without damaging the shaft
- The TMMMA 100H has a maximum withdrawal force of 100 kN (11.2 ton US) and a long stroke of 80 mm (3.1 in), which facilitates most dismounting jobs in just one operation
- For dismounting jobs requiring less force, SKF offers a 75 kN (8.4 ton US) version, the Hydraulic EasyPull TMMMA 75H with a maximum stroke of 75 mm (3 in)
- Supplied with extension pieces and one nosepiece



Hydraulic EasyPull sets

A complete bearing dismounting solution

The SKF Hydraulic EasyPull Sets, TMMMA 75H/SET and 100H/SET, are the most complete dismounting kits available on the market. The sets offer the unique combination of the hydraulic EasyPull, a tri-section pulling plate and a puller protection blanket. Combined together, the components of the set facilitate safe and easy dismounting of bearings, such as spherical roller and CARB bearings, or other components, such as pulleys and flywheels.

In addition to the benefits of the hydraulic EasyPulls, which are the essential part of the set, the sets include:

- A tri-section pulling plate, TMMS series, that facilitates easy and virtually damage-free dismounting, especially of spherical roller and CARB bearings
- A puller protection blanket, TMMX series, which is made of transparent material allowing the user to visually follow the dismounting procedure. It also increases the user's safety, while dismounting, as it helps to protect from flying fragments of bearings or other components
- A durable storage case filled with custom made storage facilities for all parts minimizing the risk of losing or damaging any of the components
- A complete solution for effortless and safe dismounting for many bearing types, especially spherical roller and CARB bearings, as well other components such as pulleys and flywheels



Technical data mechanical EasyPull


Designation	TMMA 60	TMMA 80	TMMA 120
General			
Width of grip external, minimum	36 mm (1.4 in)	52 mm (2.0 in)	75 mm (3.0 in)
Width of grip external, maximum	150 mm (5.9 in)	200 mm (7.8 in)	250 mm (9.8 in)
Effective arm length	150 mm (5.9 in)	200 mm (7.8 in)	250 mm (9.8 in)
Maximum withdrawal force	60 kN (6.7 ton US)	80 kN (9.0 ton US)	120 kN (13.5 ton US)
Total weight	4,0 kg (8.8 lb)	5,7 kg (12.6 lb)	10,6 kg (23.4 lb)
Claw dimensions			
Claw height	7,5 mm (0.30 in)	9,8 mm (0.39 in)	13,8 mm (0.54 in)
Claw length	15 mm (0.6 in)	18 mm (0.7 in)	24 mm (0.9 in)
Claw width	20 mm (0.8 in)	28 mm (1.1 in)	40 mm (1.6 in)
Force generators			
Hexagon on puller or adapter	27 mm	30 mm	32 mm
Hexagon on mechanical spindle	17 mm	22 mm	24 mm
Max torque	105 Nm (75 lbf ft)	175 Nm (125 lbf ft)	265 Nm (195 lbf ft)
Diameter nose piece	24 mm (0.9 in)	26 mm (1.0 in)	28 mm (1.1 in)
Adapter: possible to upgrade to hydraulic version	no	yes	yes
Spare parts			
Arm	TMMA 60-1	TMMA 80-1	TMMA 120-1
Spindle with nose piece (and adapter)	TMMA 60-2	TMMA 80-2	TMMA 120-2
Opening mechanism	TMMA 60-3	TMMA 75H/80-3	TMMA 100H/12-3
Accessories			
Puller protection blanket	TMMX 210	TMMX 280	TMMX 350
Gloves	TMBA G11W	TMBA G11W	TMBA G11W
Hydraulic spindle	-	TMHS 75	TMHS 100
Spindle grease	LGEV 2/0.035	LGEV 2/0.035	LGEV 2/0.035
Tri-section pulling plates	TMMS 50	TMMS 50 TMMS 100	TMMS 50 TMMS 100 TMMS 160

Technical data hydraulic EasyPull

Designation	TMMA 75H	TMMA 100H
General		
Width of grip external, minimum	52 mm (2 in)	75 mm (3 in)
Width of grip external, maximum	200 (7.8 in)	250 (9.8 in)
Effective arm length	200 mm (7.8 in)	250 mm (9.8 in)
Maximum withdrawal force	75 kN (8.4 ton US)	100 kN (11.2 ton US)
Total weight	7.2 kg (15.9 lb)	13.2 kg (29 lb)
Claw dimensions		
Claw height	9.8 mm (0.39 in)	13.8 mm (0.54 in)
Claw length	18 mm (0.7 in)	24 mm (0.9 in)
Claw width	28 mm (1.1 in)	40 mm (1.6 in)
Force generator		
Hydraulic spindle	TMHS 75	TMHS 100
Piston stroke	75 mm (3.0 in)	80 mm (3.1 in)
Body thread	UN 1,25"x12	UN 1,5"x16
Diameter nose piece	35 mm (1.4 in)	30 mm (1.2 in)
Spare parts		
Arm	TMMA 75H-1	TMMA 100H-1
Opening mechanism	TMMA 75H/80-3	TMMA 100H/12-3
Hydraulics extension piece set	TMHS 5T	TMHS 8T
Accessories		
Hydraulic spindle	TMHS 75 (included)	TMHS 100 (included)
Puller protection blanket	TMMX 280	TMMX 350
Gloves	TMBA G11W	TMBA G11W
Tri section pulling plates	TMMS 50 TMMS 100	TMMS 50 TMMS 100 TMMS 160

Technical data hydraulic EasyPull sets

Designation	TMMA 75H/SET	TMMA 100H/SET
Puller	TMMA 75H	TMMA 100H
Tri-section pulling plate	TMMS 100	TMMS 160
Width of grip shaft, min	26 mm (1.0 in)	50 mm (2.0 in)
Width of grip shaft, max	100 mm (3.9 in)	160 mm (6.3 in)
Weight	2,6 kg (5.7 lb)	5,9 kg (13.0 lb)
Puller protection blanket	TMMX 280	TMMX 350
Max diameter	280 mm (11 in)	350 mm (14 in)
Length	970 mm (38 in)	1200 mm (47 in)
Width	480 mm (19 in)	580 mm (23 in)
Weight	0,5 kg (1.2 lb)	0,6 kg (1.4 lb)
Case		
Length	610 mm (24 in)	680 mm (27 in)
Width	260 mm (10 in)	320 mm (13 in)
Height	260 mm (10 in)	270 mm (11 in)
Weight	5,0 kg (11.0 lb)	12,0 kg (26.5 lb)
Total weight (packed)	15,3 kg (33.7 lb)	31,6 kg (70 lb)

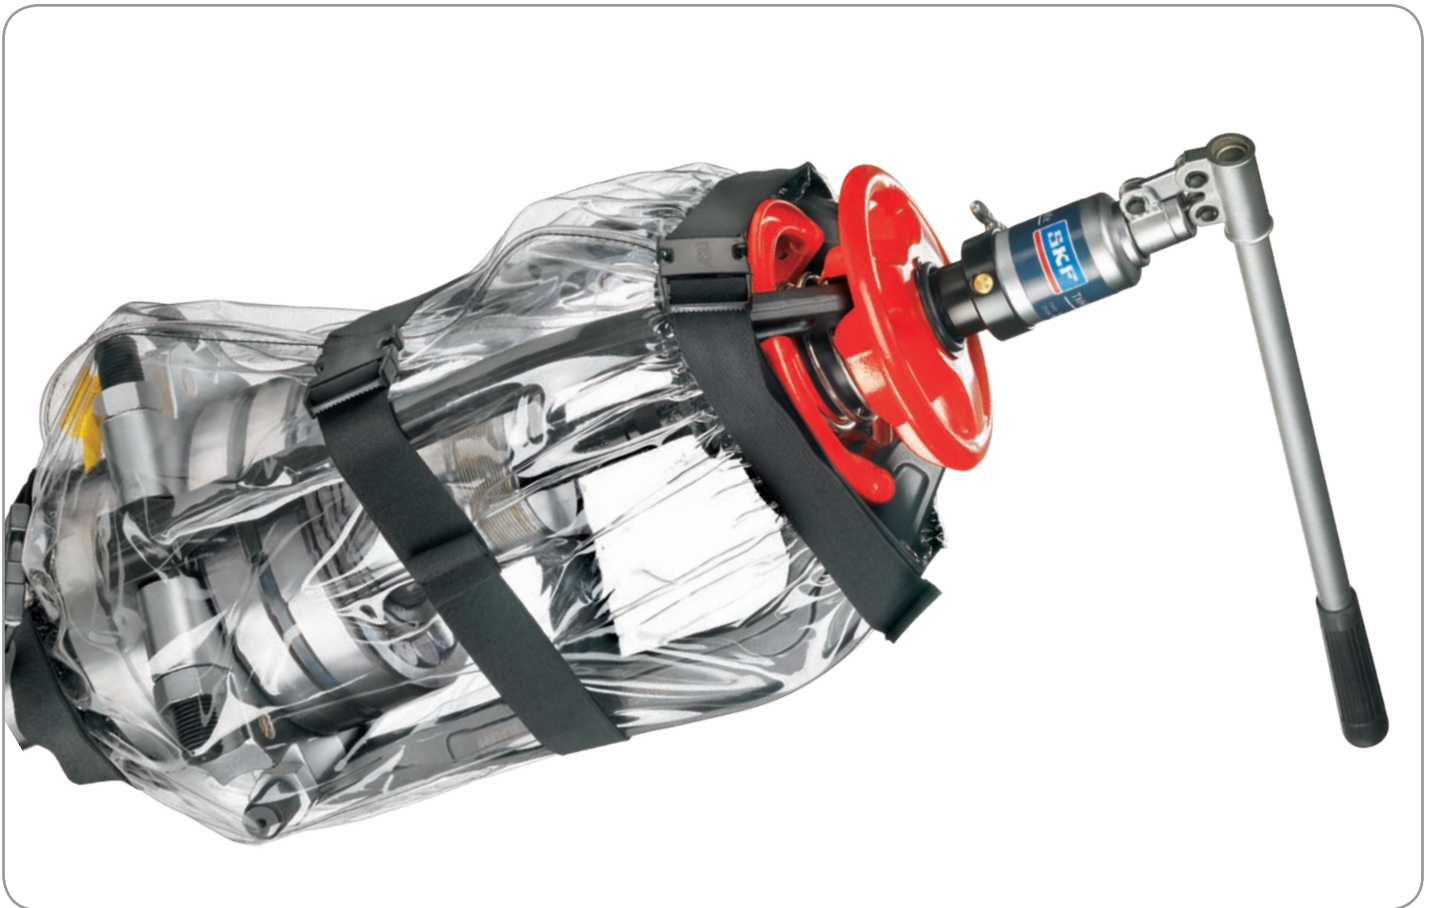

© SKF is a registered trademark of the SKF Group

© SKF Group 2010

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

MP/PDS TMMA EN · June 2010

www.mapro.skf.com · skf.com/mount · skf.com/lubrication

